


## Rail universel RPA

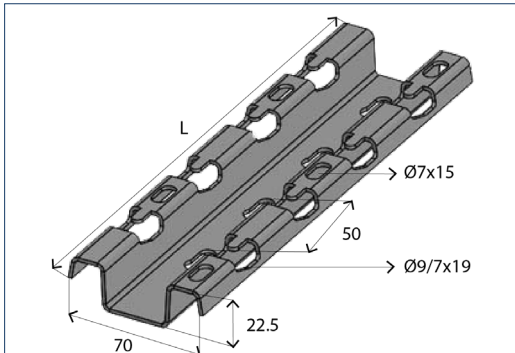

Finitions standards :  

Avantages du produit :  

### DESCRIPTION

Le rail universel RPA permet de supporter du chemin de câbles fil ou tôle.

### CARACTÉRISTIQUES

|          | Kg/ml | Long.mm | Cond. en P | SZ     |            | GAC    |            |
|----------|-------|---------|------------|--------|------------|--------|------------|
|          |       |         |            | Ep. mm | Références | Ep. mm | Références |
| RPA 100  | 0,20  | 210     | 10 p.      | 12/10  | 150715     | 15/10  | 250715     |
| RPA 200  | 0,33  | 310     |            |        | 150725     |        | 250725     |
| RPA 300  | 0,46  | 410     |            |        | 150735     |        | 250735     |
| RPA 400  | 0,71  | 510     |            | 15/10  | 150745     | 15/10  | 250745     |
| RPA 500  | 0,87  | 610     |            |        | 150755     |        | 250755     |
| RPA 2000 | 2,75  | 2110    | 2 p.       | 18/10  | 150702     | 18/10  | 250702     |
| RPA 3000 | 4,83  | 3110    |            |        | 150703     |        | 250703     |

\*Poids avant galvanisation

### EXEMPLE DE MONTAGE SUR CHEMIN DE Câbles TôLE OBR EN BALANCELLE

Placer le chemin de câbles sur le rail RPA.  
Prévoir 2 boulons TRCC 6x12 par rail et 2 écrous embases M6 par tige filetée M6.




TRCC 6x12



ECROU EMBASE



TIGE FILETÉE

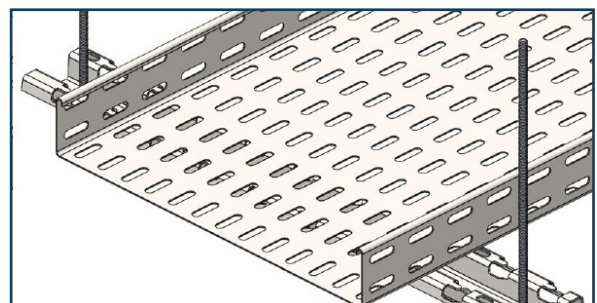

## Rail universel RPA

### EXEMPLE DE MONTAGE SUR CHEMIN DE Câbles FIL OB

Rabattre les pattes du rail pour immobiliser le montage.

